

WP4.5-6 6Volt 4.5Ah

Specifications

Nominal Voltage(V) **6V**

Nominal Capacity

20 hour rate	(0.225A to	5.25V)	4.5Ah
10 hour rate	(0.428A to	5.25V)	4.275Ah
5 hour rate	(0.765A to	5.1V)	3.825Ah
1 C	(4.5A to	4.8V)	2.55Ah
3 C	(13.5A to	4.8V)	1.8Ah

Weight **Approx. 820g(1.80Lbs.)**

Internal Resistance (at 1KHz) **Approx. 19 mΩ**

Maximum Discharge Current for 5 seconds: **67.5A**

Charging Methods at 25 (77)

Cycle use:

Charging Voltage **7.20 to 7.50V**

Coefficient -5.0mV/ /cell

Maximum Charging Current : **1.35A**

Standby use:

Float Charging Voltage **6.75 to 6.90V**

Coefficient -3.0mV/ /cell

Operating Temperature Range

Charge **-15 (5) to 40 (104)**

Discharge **-15 (5) to 50 (122)**

Storage **-15 (5) to 40 (104)**

Charge Retention (shelf life) at 20 (68)

1 month **92%**

3 month **90%**

6 month **80%**



Case Material **ABS UL94 HB**

Option: Flammability resistance of (UL94 V-0)


Terminal **F1 or F2 (Faston Tab 187 or 250)**




Dimensions mm(inch)

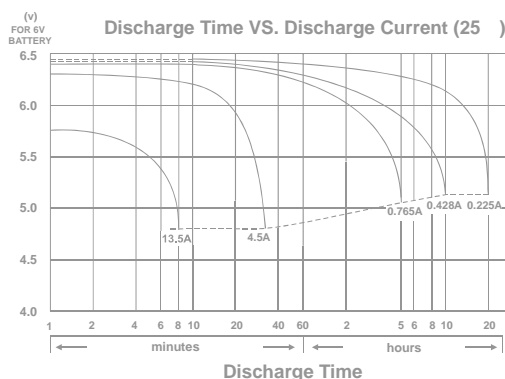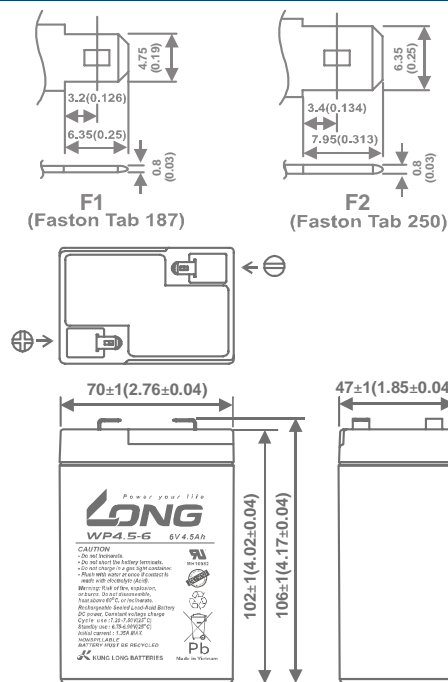


Effect of Temperature on Capacity 25 (77)

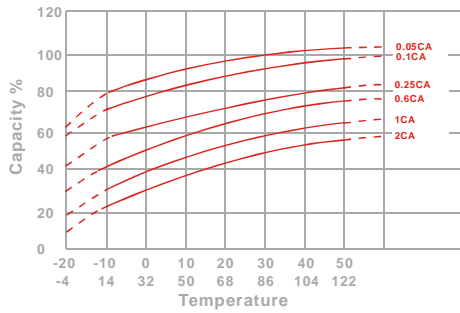


Capacity Retention Characteristic

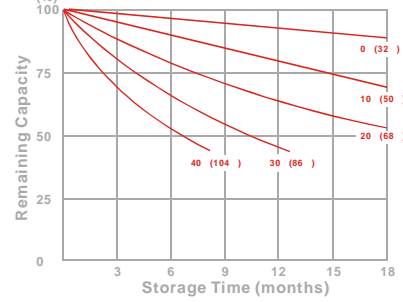

Trickle (or float) Service Life



Cycle Service Life

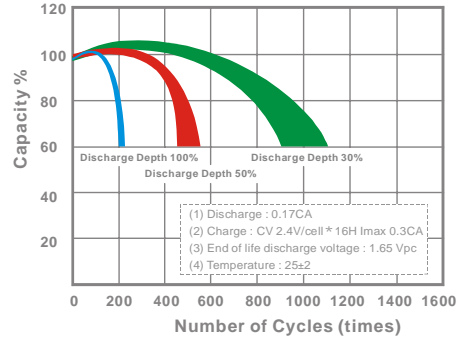

- PERFORMANCE DATA

Discharge Rates in Watts to Various End Voltages at 25 (77)

Time	End Voltage	1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
5	min	23.8	26.8	29.0	31.0	31.8	32.8	34.0
10	min	17.0	19.2	20.5	21.5	22.0	22.5	23.0
15	min	14.1	15.6	16.2	16.5	16.7	16.8	17.0
30	min	8.18	9.15	9.52	9.70	9.80	9.92	10.0
60	min	4.20	4.77	5.13	5.43	5.53	5.65	5.73
120	min	2.48	2.77	2.90	3.00	3.05	3.12	3.18
180	min	1.97	2.17	2.27	2.35	2.38	2.43	2.48
240	min	1.60	1.73	1.80	1.85	1.88	1.92	1.95
300	min	1.46	1.56	1.60	1.64	1.65	1.68	1.72
600	min	0.855	0.913	0.940	0.960	0.968	0.978	0.992
1200	min	0.432	0.468	0.498	0.510	0.513	0.520	0.527

- Discharge Rates in Amperes to Various End Voltages at 25 (77)

Time	End Voltage	1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
5	min	15.3	17.6	18.9	19.5	19.7	19.9	20.2
10	min	10.5	11.7	11.9	12.1	12.2	12.3	12.4
15	min	7.56	8.22	8.71	8.92	8.99	9.07	9.15
30	min	4.39	4.94	5.11	5.25	5.30	5.35	5.41
60	min	2.36	2.61	2.73	2.84	2.87	2.91	2.94
120	min	1.32	1.44	1.50	1.54	1.55	1.57	1.59
180	min	1.09	1.15	1.18	1.20	1.21	1.22	1.23
240	min	0.835	0.891	0.916	0.942	0.948	0.955	0.963
300	min	0.776	0.812	0.825	0.837	0.841	0.846	0.852
600	min	0.435	0.452	0.464	0.473	0.477	0.481	0.486
1200	min	0.219	0.233	0.241	0.247	0.250	0.253	0.257

All data on the spec. sheet is an average value:

The tolerance range : X<6min(+15%~-15%), 6min X<10min(+12%~-12%),10min X < 60min(+8%~-8%), X 60min(+5%~-5%)

211016-11



Head Quarter Service - TEL: +886-49-2254-777
 USA Customer Service - TEL: +1-949-328-7936
 Vietnam Customer Service - TEL: +84-72-3779666

FAX: +886-49-2255-139
 FAX: +1-949-266-9917
 FAX: +84-72-3779476

E-mail: sales@mail.klb.com.tw
 E-mail: sales@kunglong.com
 E-mail: sales@mail.klb.com.tw