

### Lithium Iron Phosphate (LiFePO4) Battery

#### VTM1230(12.8V30Ah)


#### Features

- ◆ Using the technology of lithium iron phosphate cell, superior safety, thousands of cycles, 100%DOD, under normal conditions.
- ◆ Built-in automatic protection for over-charge, over discharge, over current and over temperature.
- ◆ Free of maintenance .
- ◆ Internal cell balancing.
- ◆ Lighter weight: About 40% ~50% of the weight of a comparable lead acid battery.
- ◆ Replacement for lead-acid battery.
- ◆ Wider temperature range:-20℃~60℃.
- ◆ Support for Series application expansion (up to 51.2V) or two in parallel.



#### Application

- ◆ UPS
- ◆ Solar & Wind Power System
- ◆ Golf Cart
- ◆ Electric Vehicle , E-bike, E-rickshaw etc.
- ◆ Lighting

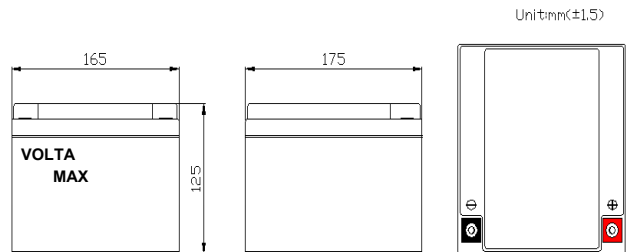


#### General Specifications

Electrical Characteristics	Nominal Voltage	12.8V
	Nominal Capacity	30Ah@0.2C
	Min. Capacity	29Ah@0.2C
	Energy	384Wh
	Internal Resistance	≤30mΩ
	Cycle Life	2000 Cycles @ 6A Charging/Discharging ,Until 70% Capacity
	Self Discharge	≤3.5% per month at 25℃
Standard Charging	Max.Charging Voltage	14.0~14.4V
	Charging Mode	At 0℃~45℃ temperature, charged to 14.4V at a constant current of 6A, and then,changed continuously with constant voltage of 14.4V until the current was not more than 0.6A
	Charging Current	6A
	Max.Charging Current	15A
Standard Discharging	Discharging Current	6A
	Max. Continuous Current	30A
	Max.Pulse Current	60A(<3S)
	Discharging Cut-off Voltage	10.0V
Operating Condition	Charge Temperature	0℃ to 45℃ (32℉ to 113℉) @60±25% Relative Humidity
	Discharge Temperature	-20℃ to 60℃ (-4℉ to 140℉) @60±25% Relative Humidity
	Storage Temperature	0℃ to 45℃ (32℉ to 113℉) @60±25% Relative Humidity
	Water Dust Resistance	IP55
Structure	Cell & Format	IFR32700 N60&4S5P
	Casing	Plastic
	Dimension(L*W*H*TH)	165*175*125*125mm
	Weight	Approx. 3.75Kg
	Terminal	M5


### Lithium Iron Phosphate (LiFePO<sub>4</sub>) Battery

#### VTM(1230)12.8V30Ah


Different Rate Discharge Curve @25°C

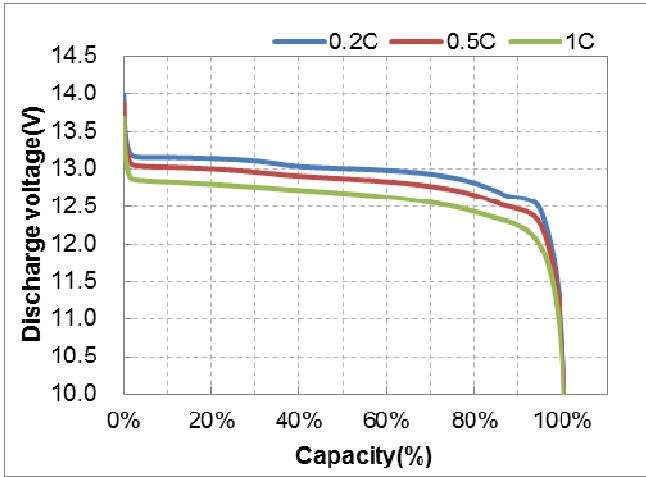


Charge Characteristics of capacity-voltage@0.2C&0.5C, 25°C

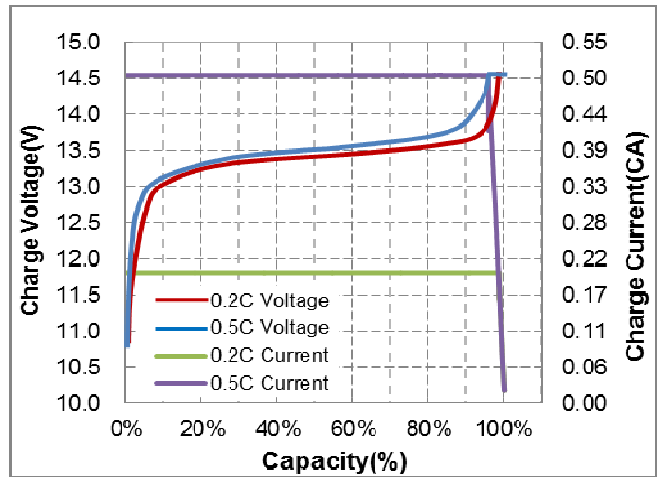


Different Temperature Discharge Curve @0.5C

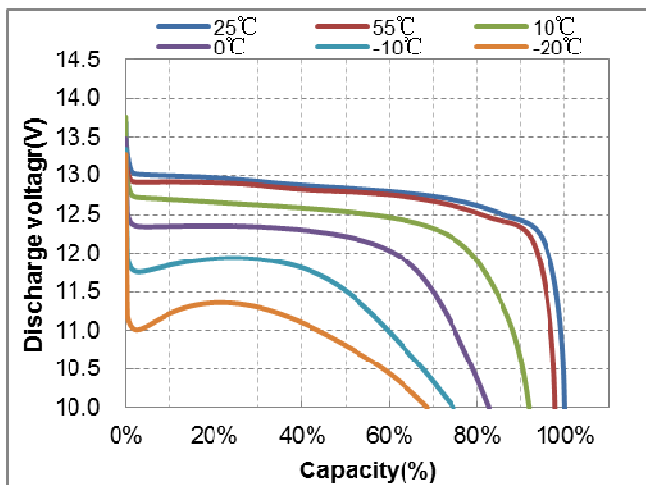

Charge Characteristics of time-voltage@ 25°C

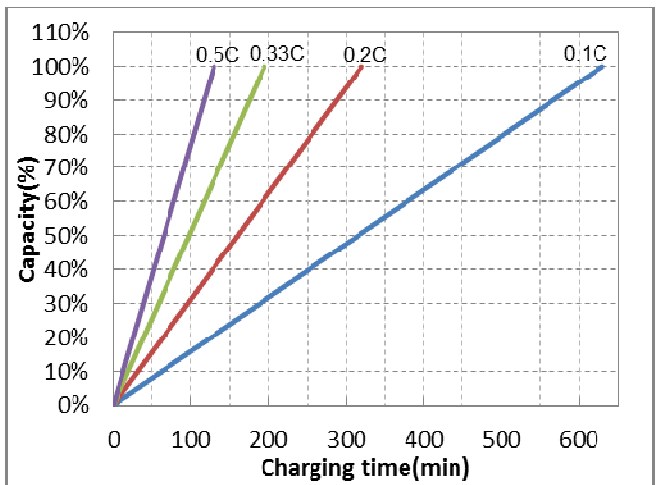

Different DOD Discharge Cycle Life Curve @0.2C,25°C

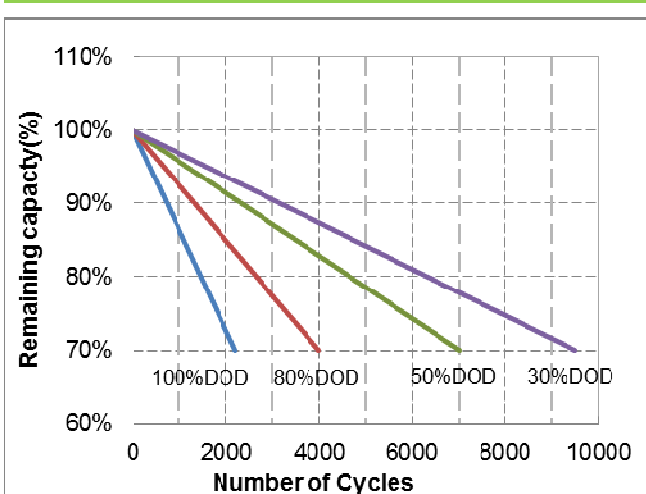

Open circuit voltage VS SOC%@25°C

